

Low Noise Amplifier

0.1-2.5GHz / 2.0dB NF/30dB Gain/16 dBm P1dB

Model: TLLA0.1G2.5G-30-20

TLLA0.1G2.5G-30-20 is a low noise amplifier with small signal gain of 30 dB and a nominal noise figure of 2.0 dB across the frequency range of 0.1 to 2.5 GHz. The DC power requirement for the amplifier is +5 V DC/60 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Ultra Wide Band:0.1-2.5GHz
- Gain: 30dB Min
- Noise Figure: 2.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.1		2.5	GHz
增益 Gain	30			dB
增益平坦度 Gain Flatness		±0.8		dB
噪声系数 Noise Figure		2		dB
线性输出功率 Output P1dB		16		dBm
输出三阶交调 Output IP3		25		dBm
输入驻波 Input VSWR		1.5		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		5	8	V DC
直流电流 DC Supply Current		60		mA
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:

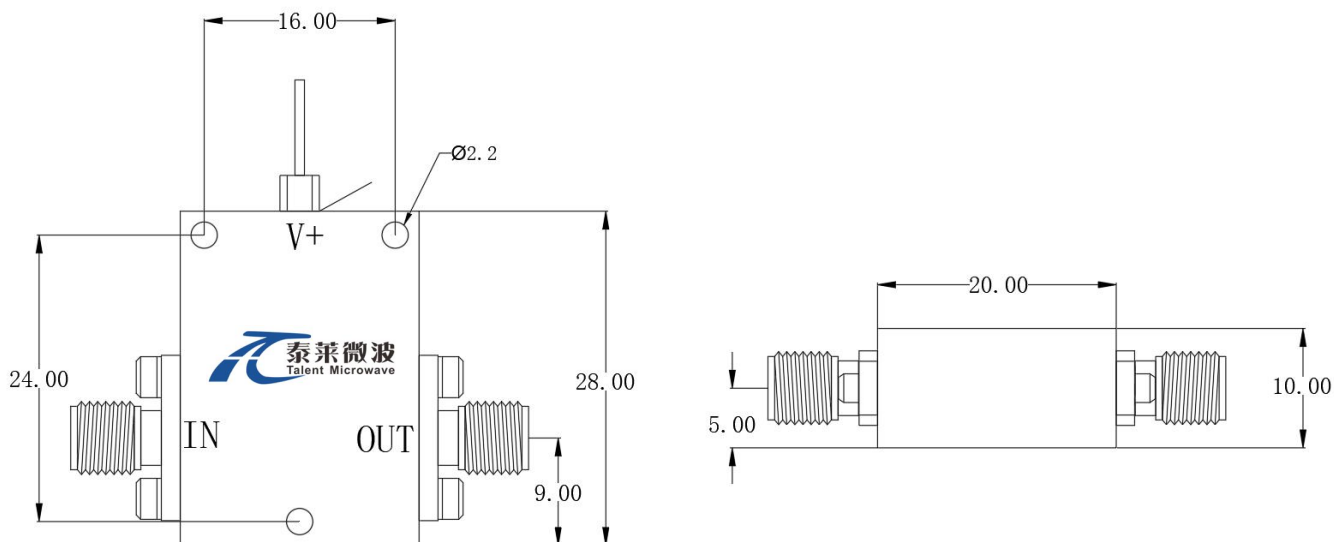
参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	20*28*10	mm

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+8 V
输入功率 RF Input Power	-6 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm


*****Heat Sink Required During Operation**

 OBSERVE PRECAUTIONS
 ELECTROSTATIC SENSITIVE
 DEVICES

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA0.1G2.5G-30-20	Low Noise Amplifier, 0.1-2.5GHz, Noise Figure:2.0dB, Gain:30 dB,P1dB:16dBm,+5V DC,Without Heatsink	Rev.1.1
TLLA0.1G2.5G-30-20-HS	Low Noise Amplifier, 0.1-2.5GHz, Noise Figure:2.0dB, Gain:30 dB,P1dB:16dBm,+5V DC,With Heatsink	Rev.1.1